

Characteristics	M.U.	EMO04BM1B	EMO04CM1B
Cooling capacity EN814 - A35A35	W	380	380
Cooling capacity EN814 - A35A50	W	240	240
Power supply	V ~ Hz	230 1~ 50-60	115 1~ 50-60
Width	mm	285	285
Height	mm	460	460
Depth	mm	180	180+35**
Max. current	A	1,6	3,2
Inrush current	A	6	11
Fuse T	A	4	6
Absorbed electric power EN814 - A35A35	W	280	290
Absorbed electric power EN814 - A35A50	W	330	340
Duty cycle	-	100 %	100 %
Electrical connection	-	4 pole plug	4 pole plug
Refrigerant R134a	Kg	0,11	0,11
Cooling circuit max. pressure	bar	26	26
External fan air flow	m ³ /h	280	280
Enclosure fan air flow	m ³ /h	280	280
Internal temperature range	°C	+20/+46	+20/+46
Temperature setting	-	Electromechanical thermostat factory set at 35 °C	
External temperature range	°C	-20/+55*	-20/+50
Protection level EN60529 - enclosure side	-	IP54	IP54
Protection level EN60529 - ambient side	-	IP34	IP34
Noise level	dB (A)	60	60
Weight	Kg	17	18
Conformity	-	CE	CE
Colour	-	RAL 7035 orange peel effect	


* 50 °C at 60 Hz

** Depth increases due to the external mounting of the autotransformer

Accessories/Options	
Pack of 5 cloth air filters	AAEFP04
Pack of 1 metal air filter	AAEFM04
Stainless steel version	
Special paint on request	
48VDC evaporator fan	
Anti vandalism fixing devices	
High temperature alarm	
Pressure alarms (high and low)	



Dimensions

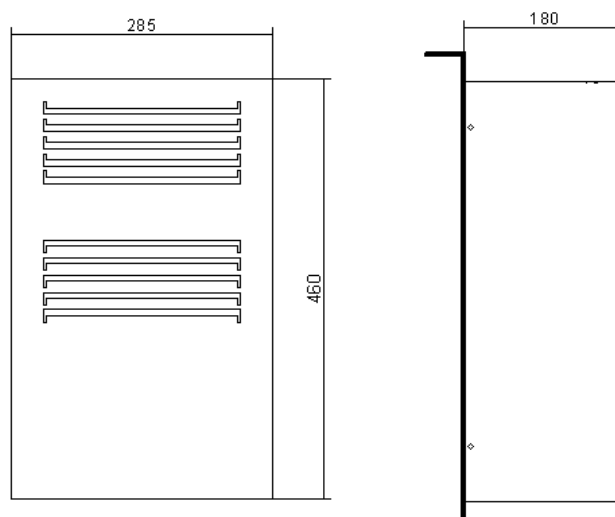

Performances

